

X101AR

Valve Position Indicator with Air Release Valve



Air Bleed Screw

- Automatically Relieves Air in Cover Chamber
- Positive Visual Valve Position Indicator
- Maximum Pressure 225 psi
- Stainless Steel Construction

Specifications

Sizes: 1" thru 16; Consult Factory for larger sizes

Materials: Stainless Steel, Pyrex Tube

Pressure Rating: 225 psi
Max Temperature: 180° F

Installation

The Model X101AR Valve Position Indicator with Air Release Valve can be installed on any Cla-Val basic main valve in a matter of minutes. Simply remove the fitting on top of the valve, thread in the X101AR stem to the main valve stem, then thread the indicator housing onto the main valve cover.




For automatic air release operation, unscrew air bleed screw at least one turn off of seat.

The air release valve cannot be retrofitted to an existing X101 Valve Position Indicator.

When Ordering, Please Specify

- 1. Valve Size
- 2. Catalog No. X101AR
- 3. Valve Series No. (Appears on Valve Nameplate)

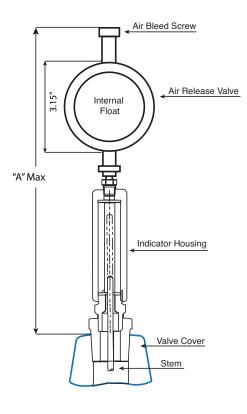

Valve Size (Inches)	"A" Max Inches
1″	8-1/2"
1-1/4"	8-1/2"
1-1/2"	8-1/2"
2″	9″
3″	9″
4"	10″
6″	10″
8″	11-1/2″
10″	13-1/2″
12″	14"
14"	N/A
16″	16-1/2"